


# A6063-T5 平角

〈比重=2.69〉



●在庫・△取寄


a	b	長さ mm	1本重量 kg	在庫
2.0	10.0	4,000	0.22	△
2.0	15.0		0.33	●
2.0	20.0		0.43	●
2.0	25.0		0.54	●
2.0	30.0		0.65	●
2.0	40.0		0.87	△
2.0	50.0		1.08	△
3.0	10.0		0.33	●
3.0	12.0		0.39	△
3.0	15.0		0.49	●
3.0	20.0		0.65	●
3.0	25.0		0.81	●
3.0	30.0		0.98	●
3.0	35.0		1.14	△
3.0	40.0		1.30	●
3.0	50.0		1.63	●
3.0	60.0		1.95	△
3.0	70.0		2.28	△
4.0	10.0		0.43	●
4.0	12.0		0.52	●
4.0	15.0		0.65	●
4.0	20.0		0.87	●
4.0	25.0		1.09	●
4.0	30.0		1.31	●
4.0	40.0		1.74	●
4.0	50.0		2.17	●
4.0	60.0		2.60	△
4.0	70.0		3.04	△
5.0	10.0		0.55	●
5.0	12.0		0.62	●
5.0	15.0		0.81	●
5.0	20.0		1.08	●
5.0	25.0		1.36	●
5.0	30.0		1.63	●
5.0	35.0		1.90	△
5.0	40.0		2.17	●
5.0	50.0		2.72	●
5.0	60.0		3.25	●
5.0	70.0		3.80	●
5.0	100.0		5.42	●

\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。

## A6063-T5 平角

<比重=2.69>

●在庫・△取寄




a	b	長さ mm	1本重量 kg	在庫
6.0	9.0	4,000	0.59	●
6.0	10.0		0.65	●
6.0	12.0		0.78	●
6.0	15.0		0.98	●
6.0	20.0		1.30	●
6.0	25.0		1.65	●
6.0	30.0		1.95	●
6.0	35.0		2.28	●
6.0	40.0		2.60	●
6.0	50.0		3.25	●
6.0	60.0		3.90	●
6.0	75.0		4.90	●
6.0	100.0		6.50	●
6.0	160.0		10.41	△
8.0	15.0		1.30	●
8.0	20.0		1.74	●
8.0	25.0		2.20	●
8.0	30.0		2.60	●
8.0	32.0		2.78	●
8.0	35.0		3.04	●
8.0	40.0		3.47	●
8.0	50.0		4.34	●
8.0	60.0		5.20	●
8.0	75.0		6.50	●
8.0	100.0		8.67	△
9.0	20.0		1.95	△
9.0	30.0		2.93	△
9.0	40.0		3.90	△
9.0	50.0		4.88	△
9.0	60.0		5.84	△
9.0	75.0		7.29	△
9.0	100.0		9.72	△

\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。



# A6063-T5 平角

〈比重=2.69〉



●在庫・△取寄


a	b	長さ mm	1本重量 kg	在庫
10.0	15.0	4,000	1.63	●
10.0	20.0		2.17	●
10.0	25.0		2.71	●
10.0	30.0		3.27	●
10.0	35.0		3.80	●
10.0	40.0		4.34	●
10.0	45.0		4.88	●
10.0	50.0		5.44	●
10.0	60.0		6.50	●
10.0	64.0		6.94	△
10.0	70.0		7.59	●
10.0	75.0		8.16	●
10.0	80.0		8.67	●
10.0	100.0		10.84	●
10.0	120.0		12.96	△
10.0	125.0		13.50	●
10.0	150.0		16.28	●
12.0	15.0		1.95	●
12.0	20.0		2.60	●
12.0	25.0		3.26	●
12.0	30.0		3.90	●
12.0	40.0		5.24	●
12.0	50.0		6.50	●
12.0	60.0		7.81	△
12.0	75.0		9.72	●
12.0	100.0		12.96	●
12.0	120.0		15.55	●
13.0	25.0		3.54	●
13.0	40.0		5.64	●
15.0	20.0		3.25	●
15.0	25.0		4.08	●
15.0	30.0		4.92	●
15.0	40.0		6.53	●
15.0	50.0		8.16	●
15.0	60.0		9.76	●
15.0	75.0		12.20	●
15.0	100.0		16.26	●
15.0	150.0		24.39	△
15.0	200.0	2,500	20.33	△
20.0	25.0	4,000	5.44	●
20.0	30.0		6.50	●
20.0	35.0		7.60	●

\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。

## A6063-T5 平角

<比重=2.69>

●在庫・△取寄




a	b	長さ mm	1本重量 kg	在庫
20.0	40.0	4,000	8.67	●
20.0	50.0		10.84	●
20.0	60.0		13.01	●
20.0	70.0		15.21	●
20.0	80.0		17.28	●
20.0	100.0	2,000	10.88	●
20.0	150.0	4,000	20.33	△
20.0	200.0	2,500	27.10	△
25.0	30.0	4,000	8.12	●
25.0	35.0		9.52	●
25.0	40.0		10.88	●
25.0	50.0		13.60	●
25.0	60.0		16.26	●
25.0	80.0		21.68	●
25.0	100.0		16.94	△
25.0	150.0		25.41	△
25.0	200.0		33.88	△
30.0	40.0		13.00	●
30.0	50.0		16.30	●
30.0	60.0		19.60	●
30.0	65.0		21.20	●
30.0	75.0		24.40	●
30.0	100.0		32.44	●
30.0	150.0	2,500	30.49	△
30.0	200.0		40.65	△
35.0	40.0	4,000	15.24	●
35.0	50.0		18.97	●
35.0	60.0		22.76	●
35.0	85.0		32.25	△
35.0	100.0	2,500	23.72	△
40.0	50.0	4,000	21.68	●
40.0	60.0		26.12	●
40.0	75.0		32.52	●
40.0	100.0		43.20	●
50.0	100.0	2,500	33.90	△
76.0	100.0		51.49	△

\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。

# A6063-T5 四角

〈比重=2.69〉



●在庫・△取寄

a	b	長さ mm	1本重量 kg	在庫
5.0	5.0	4,000	0.14	△
6.0	6.0		0.40	●
7.0	7.0		0.53	△
8.0	8.0		0.70	●
9.0	9.0		0.88	△
10.0	10.0		1.08	●
12.0	12.0		1.56	●
13.0	13.0		1.83	△
14.0	14.0		2.13	●
15.0	15.0		2.45	●
16.0	16.0		2.79	●
18.0	18.0		3.51	●
19.0	19.0		3.93	●
20.0	20.0		4.36	●
22.0	22.0		5.28	●
25.0	25.0		6.80	●
30.0	30.0		9.80	●
32.0	32.0		11.14	●
35.0	35.0		13.32	●
40.0	40.0		17.40	●
45.0	45.0		21.95	●
50.0	50.0		27.20	●
55.0	55.0		32.79	●
60.0	60.0		39.60	●
65.0	65.0	2,500	28.52	△
70.0	70.0	2,000	26.60	●
75.0	75.0	2,500	37.97	△
80.0	80.0	2,000	34.69	●
90.0	90.0	2,500	54.88	△
100.0	100.0	2,000	54.90	●


\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。



## A6063-T5 角管

〈比重=2.69〉

●在庫・△取寄



t	a	b	長さ mm	1本重量 kg	在庫
1.0	10.0	10.0	5,000	0.49	△
1.2	12.0	12.0		0.71	△
1.5	15.0	15.0		1.10	●
1.5	15.0	20.0		1.30	△
1.5	15.0	25.0		1.51	●
1.5	15.0	30.0		1.71	△
1.5	19.0	19.0		1.43	△
1.5	20.0	20.0		1.50	△
1.5	20.0	30.0		1.91	△
1.5	25.0	25.0		1.91	△
1.5	30.0	30.0		2.32	●
2.0	20.0	20.0		1.96	●
2.0	20.0	30.0		2.50	●
2.0	20.0	40.0		3.04	●
2.0	25.0	25.0		3.05	△
2.0	25.0	40.0		3.30	●
2.0	25.0	50.0		3.90	●
2.0	25.0	60.0		4.41	●
2.0	30.0	30.0		3.04	●
2.0	30.0	40.0		3.57	●
2.0	30.0	50.0		4.10	●
2.0	30.0	60.0		4.66	●
2.0	30.0	65.0		4.93	△
2.0	30.0	70.0		5.20	●
2.0	35.0	70.0		5.48	△
2.0	40.0	40.0		4.11	●
2.0	40.0	60.0		5.20	△
2.0	40.0	80.0		6.29	△
2.0	50.0	50.0		5.19	●
2.0	50.0	100.0		8.08	●
2.0	60.0	60.0		6.29	●
2.4	19.0	19.0		2.16	●


\*●印は在庫がございます。△印は取寄になります。

\*1本重量は、実際の販売重量と若干異なる場合があります。

# A6063-T5 角管

<比重=2.69>

●在庫・△取寄




t	a	b	長さ mm	1本重量 kg	在庫
2.5	20.0	20.0	5,000	2.36	△
2.5	20.0	30.0		3.05	△
2.5	20.0	40.0		3.73	△
2.5	25.0	25.0		3.05	●
2.5	30.0	60.0		5.76	△
2.5	30.0	100.0		8.47	●
2.5	40.0	40.0		5.08	△
2.5	40.0	60.0		6.42	●
2.5	40.0	80.0		7.80	●
2.5	50.0	50.0		6.44	●
2.5	50.0	100.0		9.90	●
2.5	50.0	150.0		13.16	△
2.5	60.0	120.0		11.90	●
2.5	70.0	70.0		9.15	△
2.5	75.0	75.0		9.52	△
2.5	80.0	80.0		10.50	●
2.5	100.0	100.0		13.16	△
2.8	60.0	120.0		13.23	△
3.0	25.0	30.0		3.98	△
3.0	25.0	40.0		4.80	△
3.0	30.0	30.0		4.39	●
3.0	30.0	40.0		5.20	●
3.0	30.0	70.0		7.65	●
3.0	40.0	40.0		6.10	●
3.0	40.0	60.0		7.64	●
3.0	40.0	80.0		9.27	△
3.0	50.0	50.0		7.70	●
3.0	50.0	100.0		11.71	△
3.0	50.0	150.0		15.85	●
3.0	100.0	100.0		15.72	● ※1
4.0	40.0	60.0		9.97	△

\*●印は在庫がございます。△印は取寄になります。

\*1本重量は、実際の販売重量と若干異なる場合があります。


※1：4隅R1付(内・外共)

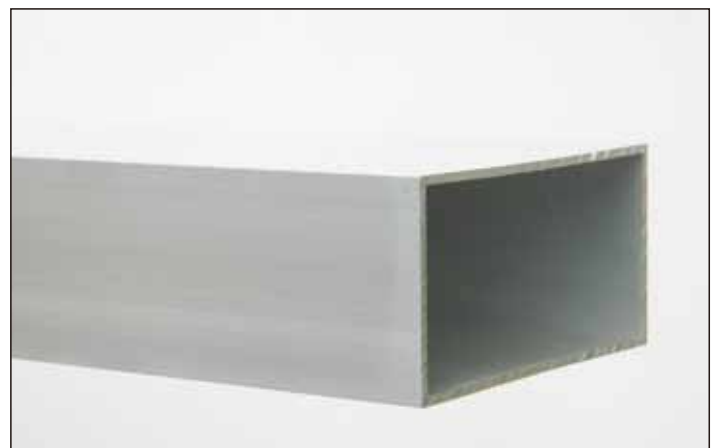

## A6063-T5 等辺アングル (Rなし)

<比重=2.69>

●在庫・△取寄



t	a	b	長さ mm	1本重量 kg	在庫
1.2	10.0	10.0	4,000	0.26	△
1.2	12.0	12.0		0.30	△
1.2	13.0	13.0		0.32	△
1.5	10.0	10.0		0.30	△
1.5	15.0	15.0		0.46	●
1.5	19.0	19.0		0.60	△
1.5	20.0	20.0		0.62	●
1.5	25.0	25.0		0.80	●
1.5	30.0	30.0		0.96	●
1.5	50.0	50.0		1.60	△
2.0	10.0	10.0		0.40	△
2.0	15.0	15.0		0.61	●
2.0	20.0	20.0		0.82	●
2.0	25.0	25.0		1.04	●
2.0	30.0	30.0		1.28	●
2.0	40.0	40.0		1.69	●
2.0	50.0	50.0		2.12	△
2.5	25.0	25.0		1.28	●
3.0	15.0	15.0		0.88	●
3.0	20.0	20.0		1.21	●
3.0	25.0	25.0		1.54	●
3.0	30.0	30.0		1.88	●
3.0	35.0	35.0		2.18	●
3.0	40.0	40.0		2.52	●
3.0	50.0	50.0		3.16	●
4.0	25.0	25.0		2.00	●
4.0	30.0	30.0		2.43	●
4.0	35.0	35.0		2.85	●
4.0	40.0	40.0		3.30	●
4.0	50.0	50.0		4.16	●


\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。



# A6063-T5 等辺アングル (Rなし)

〈比重=2.69〉


●在庫・△取寄



t	a	b	長さ mm	1本重量 kg	在庫
5.0	25.0	25.0	4,000	2.43	△
5.0	30.0	30.0		3.00	●
5.0	40.0	40.0		4.10	●
5.0	50.0	50.0		5.20	●
5.0	60.0	60.0		6.23	△
6.0	40.0	40.0		4.81	●
6.0	50.0	50.0		6.13	●
6.0	60.0	60.0		7.44	●
6.0	65.0	65.0		8.16	●
6.0	75.0	75.0		9.33	●
8.0	80.0	80.0		13.48	● ※1
9.0	75.0	75.0		13.80	● ※2
10.0	100.0	100.0		20.64	●

\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。


※1：R付(隅) ※2：R付

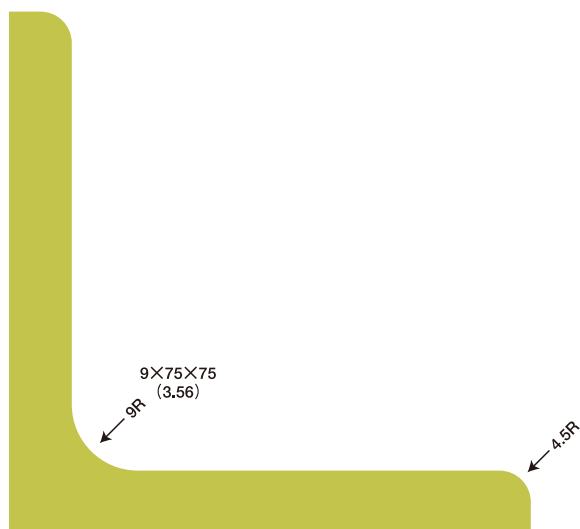

## A6063-T5 不等辺アングル(Rなし)


〈比重=2.69〉

●在庫・△取寄



t	a	b	長さ mm	1本重量 kg	在庫
1.5	10.0	15.0	4,000	0.38	△
1.5	10.0	20.0		0.48	●
1.5	10.0	25.0		0.55	△
1.5	10.0	30.0		0.63	△
1.5	10.0	40.0		0.79	△
1.5	15.0	20.0		0.55	△
1.5	15.0	25.0		0.62	●
2.0	15.0	20.0		0.72	●
2.0	15.0	25.0		0.82	●
2.0	15.0	30.0		0.94	●
2.0	20.0	25.0		0.93	△
2.0	20.0	30.0		1.01	●
2.0	20.0	40.0		1.26	●
2.0	20.0	50.0		1.47	●
2.5	13.0	35.0		1.23	●
3.0	20.0	30.0		1.53	●
3.0	20.0	40.0		1.86	●
3.0	25.0	50.0		2.35	●
4.0	35.0	50.0		3.52	●
5.0	40.0	60.0		5.16	●
5.0	50.0	75.0		6.54	●


\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。

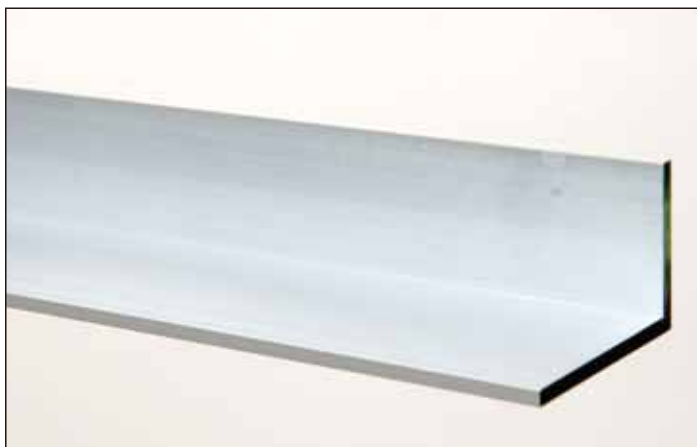

# A6063-T5 チャンネル (Rなし)

<比重=2.69>


●在庫・△取寄



t	a	b	長さ mm	1本重量 kg	在庫
1.5	10.0	10.0	4,000	0.47	●
1.5	15.0	15.0		0.69	△
2.0	10.0	18.0		0.74	●
2.0	12.0	12.0		0.70	△
2.0	12.0	22.0		0.91	●
2.0	15.0	15.0		0.90	●
2.0	15.0	30.0		1.23	●
2.0	20.0	20.0		1.22	●
2.0	20.0	40.0		1.65	△
2.0	25.0	25.0		1.54	●
2.4	20.0	35.0		1.83	△
2.4	30.0	30.0		2.22	●
2.5	20.0	35.0		1.90	●
2.5	25.0	50.0		2.56	△
3.0	15.0	30.0		1.79	●
3.0	20.0	40.0		2.42	●
3.0	25.0	30.0		2.40	●
3.0	25.0	50.0		3.07	●
3.0	30.0	60.0		3.72	●
3.2	40.0	75.0		5.11	●
4.0	40.0	80.0		6.59	●
5.0	50.0	75.0		8.94	△
5.0	50.0	100.0		10.32	●
6.0	65.0	125.0		15.88	●
8.0	75.0	150.0		24.80	● ※3


\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。

※3：R付

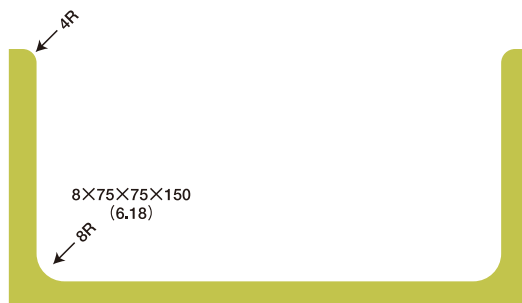

## A6063-T5 T型

<比重=2.69>




●在庫・△取寄

t	a	b	長さ mm	1本重量 kg	在庫
3.0	25.0	23.0	4,000	0.46	●
3.0	35.5	35.0		2.18	●



## A6063-T5 I型 (R付)

<比重=2.69>




●在庫・△取寄

t1	t2	a	b	長さ mm	1本重量 kg	在庫
5.0	7.5	100.0	50.0	5,000	16.65	●



## A6063-T5 C型チャンネル

<比重=2.69>



全て…L=4000 ●在庫・△取寄

t	a	b	c	長さ mm	1本重量 kg	在庫
3.0	70.0	23.0	10.0	4,000	4.03	●
3.0	100.0	25.0	20.0		5.79	△



\*●印は在庫がございます。△印は取寄になります。  
\*1本重量は、実際の販売重量と若干異なる場合があります。

# A6063 (熱処理系)

Al-Mg-Si系合金。代表的な押出合金。6061より強度は低いが押出性に優れ、複雑な断面形状の形材が得られ、耐食性、表面処理性も良好である。

用途例:

建築・車輛・家具・家電製品・サッシ



## 化学成分表 (%)

Al	Cu	Si	Fe	Mn	Mg	Zn	Cr	Ti	Zr	その他
残部	0.10以下	0.2~0.6	0.35以下	0.10以下	0.45~0.9	0.10以下	0.10以下	0.10以下	—	—

## 機械的性質

調質	引張強さ (N/mm <sup>2</sup> )	耐力 (N/mm <sup>2</sup> )	伸び (%)
T5	185	145	12

\*データは参考値であり保証値ではございません。